

R&S®FSVA

Signal and

Spectrum Analyzer

Specifications



CONTENTS

| | |
|----------------------------------------------------------------------------------------|-----------|
| Definitions | 3 |
| Specifications..... | 4 |
| Frequency | 4 |
| Sweep time..... | 6 |
| Resolution bandwidths..... | 6 |
| Level..... | 7 |
| Measurement speed..... | 14 |
| Trigger functions..... | 14 |
| I/Q data | 15 |
| Inputs and outputs | 17 |
| General data..... | 19 |
| Options | 20 |
| R&S®FSV-B3 audio demodulator..... | 20 |
| R&S®FSV-B5 additional interfaces..... | 20 |
| R&S®FSV-B9 tracking generator..... | 21 |
| R&S®FSV-B10 external generator control..... | 22 |
| R&S®FSV-B17 digital baseband interface..... | 22 |
| R&S®FSV-B21 LO/IF ports for external mixers (for R&S®FSVA30 and R&S®FSVA40 only) | 22 |
| R&S®FSV-B30 DC power supply for 12 V/24 V supply voltage | 23 |
| R&S®FSV-B32 Lithium-ion battery pack..... | 23 |
| R&S®FSV-B34 charger for R&S®FSV-B32 battery pack..... | 23 |
| Ordering information | 24 |
| Options..... | 24 |
| Recommended extras..... | 26 |
| Power sensors supported by the R&S®FSV-K9 option | 27 |

Definitions


General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, \leq , $>$, \geq , \pm , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

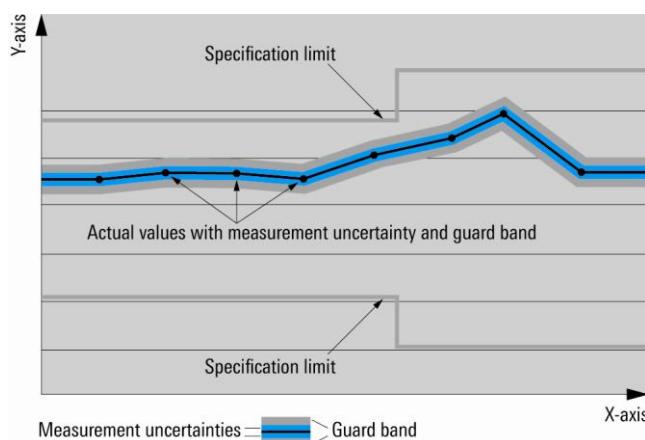

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are indicated as follows: "parameter: value".

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

Specifications


Frequency

| | | |
|-----------------------------|------------|--------------------|
| Frequency range | R&S®FSVA4 | |
| | DC coupled | 10 Hz to 4 GHz |
| | AC coupled | 1 MHz to 4 GHz |
| | R&S®FSVA7 | |
| | DC coupled | 10 Hz to 7 GHz |
| | AC coupled | 1 MHz to 7 GHz |
| | R&S®FSVA13 | |
| | DC coupled | 10 Hz to 13.6 GHz |
| | AC coupled | 10 MHz to 13.6 GHz |
| | R&S®FSVA30 | |
| | DC coupled | 10 Hz to 30 GHz |
| | AC coupled | 10 MHz to 30 GHz |
| | R&S®FSVA40 | |
| | DC coupled | 10 Hz to 40 GHz |
| | AC coupled | 10 MHz to 40 GHz |
| Frequency resolution | | 0.01 Hz |

| Reference frequency, internal | | |
|-----------------------------------------|---------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Accuracy | | (time since last adjustment × aging rate) + temperature drift + calibration accuracy |
| Aging per year | standard | 1×10^{-6} |
| | with R&S®FSV-B4 OCXO reference frequency option | 1×10^{-7} |
| | with R&S®FSV-B14 ultra-high precision reference frequency option | 4×10^{-9} |
| Temperature drift (0 °C to +50 °C) | standard | 1×10^{-6} |
| | with R&S®FSV-B4 OCXO reference frequency option, model .02 | 1×10^{-7} |
| | with R&S®FSV-B4 OCXO extended frequency stability option, model .03 | 1×10^{-8} |
| | with R&S®FSV-B14 ultra-high precision reference frequency option | 5×10^{-10} |
| Achievable initial calibration accuracy | standard | 5×10^{-7} |
| | with R&S®FSV-B4 OCXO reference frequency option | 5×10^{-8} |
| | with R&S®FSV-B14 ultra-high precision reference frequency option | 1×10^{-10} |

| Frequency readout | | |
|-----------------------------------|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Marker resolution | | 1 Hz |
| Uncertainty | | $\pm(\text{marker frequency} \times \text{reference uncertainty} + 10\% \times \text{resolution bandwidth} + \frac{1}{2} (\text{span} / (\text{sweep points} - 1)) + 1 \text{ Hz})$ |
| Number of sweep (trace) points | default value | 691 |
| | range | 101 to 32001 |
| Marker tuning frequency step size | marker step size = sweep points | span / (sweep points - 1) |
| | marker step size = standard | span / (default sweep points - 1) |
| Frequency counter resolution | | 0.001 Hz |
| Count accuracy | | $\pm(\text{frequency} \times \text{reference uncertainty} + \frac{1}{2} (\text{last digit}))$ |
| Display range for frequency axis | | 0 Hz, 10 Hz to max. frequency |
| Resolution | | 0.1 Hz |
| Max. span deviation | | 0.1 % |

| Spectral purity | |
|------------------------|----------------------------------------------------------|
| SSB phase noise | frequency = 500 MHz, carrier offset |
| | 100 Hz < -91 dBc (1 Hz) |
| | 1 kHz < -109 dBc (1 Hz) |
| | 10 kHz < -115 dBc (1 Hz) |
| | 100 kHz < -116 dBc (1 Hz) |
| | 1 MHz < -137 dBc (1 Hz) |
| | 10 MHz -150 dBc (1 Hz) (nom.) |
| Residual FM | frequency = 500 MHz, RBW = 1 kHz, sweep time = 100 ms |
| | < 3 Hz (nom.) |

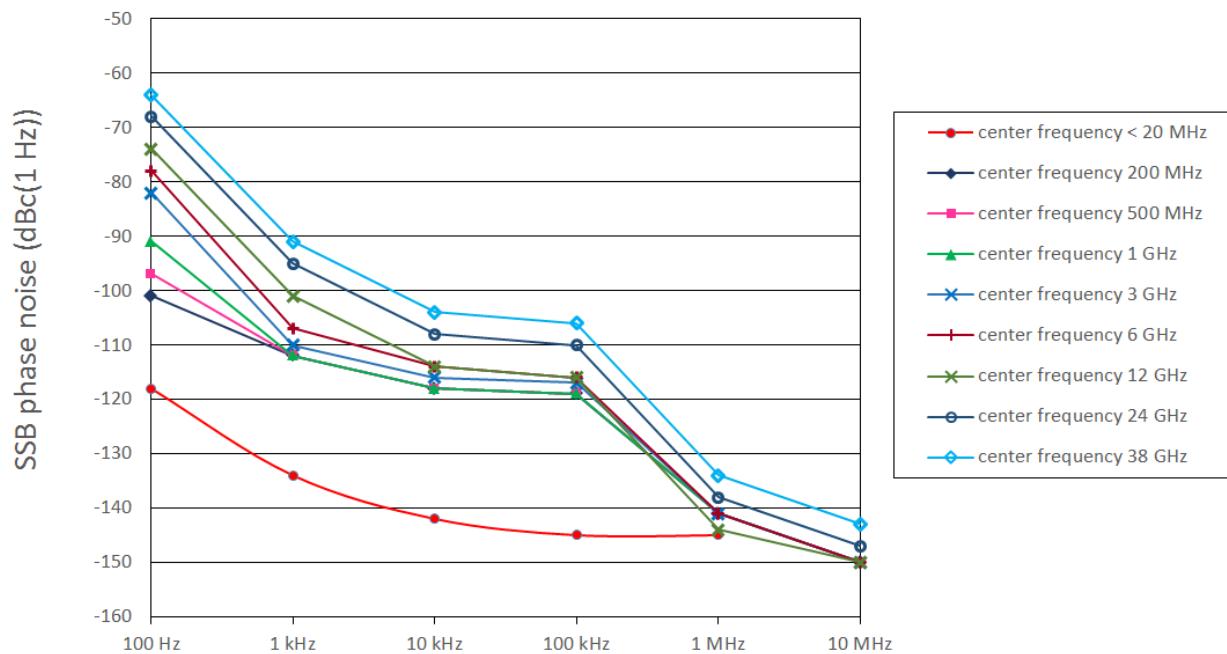

Typical phase noise at different center frequencies.

Sweep time

| | | |
|---------------------|---------------------|------------------------------|
| Range | span = 0 Hz | 1 µs to 16000 s |
| | span ≥ 10 Hz, swept | 1 ms to 16000 s ¹ |
| | span ≥ 10 Hz, FFT | 7 µs to 16000 s ² |
| Sweep time accuracy | span = 0 Hz | 0.1 % (nom.) |
| | span ≥ 10 Hz, swept | 3 % (nom.) |

Resolution bandwidths

| Sweep filters and FFT filters | | |
|-------------------------------|------------------------------------------------------------------------------------------|------------------------------------|
| Resolution bandwidths (-3 dB) | span ≥ 10 Hz, sweep filters | 1 Hz to 10 MHz in 1/2/3/5 sequence |
| | span ≥ 10 Hz, FFT filters | 1 Hz to 3 MHz in 1/2/3/5 sequence |
| | all models except R&S®FSVA40: | |
| | span = 0 Hz | 20 MHz, 28 MHz additionally |
| | with R&S®FSVA-B40 option, span = 0 Hz, YIG preselector off for $f > 7 \text{ GHz}$ | 40 MHz additionally |
| Bandwidth uncertainty | | < 3 % (nom.) |
| Shape factor 60 dB:3 dB | | < 5 (nom.) |

| Channel filters | | |
|-------------------------|--------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bandwidths (-3 dB) | standard (RRC = root raised cosine) | 100 Hz, 200 Hz, 300 Hz, 500 Hz 1, 1.5, 2, 2.4, 2.7, 3, 3.4, 4, 4.5, 5, 6, 8.5, 9, 10, 12.5, 14, 15, 16, 18 (RRC), 20, 21, 24.3 (RRC), 25, 30, 50, 100, 150, 192, 200, 300, 500 kHz 1, 1.228, 1.28 (RRC), 1.5, 2, 3, 3.84 (RRC), 4.096 (RRC), 5, 10 MHz |
| | all models except R&S®FSVA40: | |
| | span = 0 Hz | 20 MHz, 28 MHz additionally |
| | with R&S®FSVA-B40 option, YIG preselector off for $f > 7 \text{ GHz}$ | 40 MHz additionally |
| | Bandwidth uncertainty | < 2 % (nom.) |
| Shape factor 60 dB:3 dB | | < 2 (nom.) |

| EMI filters (with R&S®FSV-K54 only) | | |
|-------------------------------------|--|-------------------------------------------------------------------------|
| Bandwidths (-6 dB) | | 10 Hz, 100 Hz, 200 Hz, 1 kHz, 9 kHz, 10 kHz, 100 kHz, 120 kHz, 1 MHz |
| Bandwidth uncertainty | | < 3 % (nom.) |
| Shape factor 60 dB:6 dB | | < 4 (nom.) |

| | | |
|------------------|--------------------------------------------------------------------------|------------------------------------|
| Video bandwidths | standard | 1 Hz to 10 MHz in 1/2/3/5 sequence |
| | all models except R&S®FSVA40: | |
| | standard | 20 MHz, 28 MHz additionally |
| | with R&S®FSVA-B40 option, YIG preselector off for $f > 7 \text{ GHz}$ | 40 MHz additionally |

| | | |
|---------------------------------------|------------------------------------------------|----------------|
| Signal analysis bandwidth (equalized) | $f \leq 7 \text{ GHz}$ | |
| | standard | 28 MHz (nom.) |
| | with R&S®FSVA-B40 option | 40 MHz (nom.) |
| | with R&S®FSV-B160 option | 160 MHz (nom.) |
| | $f > 7 \text{ GHz}$, with R&S®FSVA-B11 option | |
| | standard | 28 MHz (nom.) |
| | with R&S®FSVA-B40 option | 40 MHz (nom.) |
| | with R&S®FSV-B160 option | 160 MHz (nom.) |

¹ Net sweep time without additional hardware settling time.

² Time for data acquisition for FFT calculation.

Level

| | | |
|-------------------------|--------------------------------------------------------------|-------------------------------------|
| Display range | | displayed noise floor up to +30 dBm |
| Max. input level | | |
| DC voltage | AC coupled | 50 V |
| | DC coupled | 0 V |
| CW RF power | RF attenuation 0 dB | |
| | RF preamplifier = off | 20 dBm (= 0.1 W) |
| | with R&S®FSV-B22 or R&S®FSV-B24 option, RF preamplifier = on | 13 dBm (= 0.02 W) |
| | RF attenuation ≥ 10 dB | |
| | RF preamplifier = off | 30 dBm (= 1 W) |
| | with R&S®FSV-B22 or R&S®FSV-B24 option, RF preamplifier = on | 23 dBm (= 0.2 W) |
| Pulse spectral density | RF attenuation 0 dB, RF preamplifier = off | 97 dB μV/MHz |
| Max. pulse voltage | RF attenuation ≥ 10 dB | 150 V |
| Max. pulse energy | RF attenuation ≥ 10 dB, 10 μs | 1 mWs |

| | | |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| Intermodulation | | |
| 1 dB compression of input mixer | RF attenuation 0 dB, RF preamplifier = off | |
| | f ≤ 7 GHz | +10 dBm (nom.) |
| | f > 7 GHz | +5 dBm (nom.) |
| | with R&S®FSV-B22 or R&S®FSV-B24 option, RF preamplifier = on, RF attenuation 0 dB | |
| | f ≤ 7 GHz | -5 dBm (nom.) |
| | f > 7 GHz | -25 dBm (nom.) |
| Third-order intercept point (TOI) | RF attenuation 0 dB, level 2 × -15 dBm, Δf > 5 × RBW or 10 kHz, whichever is larger, RF preamplifier = off | |
| | R&S®FSVA4, R&S®FSVA7 | |
| | 10 MHz ≤ f _{in} < 100 MHz | > 12 dBm, 15 dBm (typ.) |
| | 100 MHz ≤ f _{in} < 300 MHz | > 15 dBm, 18 dBm (typ.) |
| | 300 MHz ≤ f _{in} < 3.6 GHz | > 17 dBm, 20 dBm (typ.) |
| | 3.6 GHz ≤ f _{in} ≤ 7 GHz | > 16 dBm, 19 dBm (typ.) |
| | R&S®FSVA13, R&S®FSVA30, R&S®FSVA40 | |
| | 10 MHz ≤ f _{in} < 300 MHz | > 15 dBm, 18 dBm (typ.) |
| | 300 MHz ≤ f _{in} < 3.6 GHz | > 17 dBm, 20 dBm (typ.) |
| | 3.6 GHz ≤ f _{in} ≤ 10 GHz | > 16 dBm, 19 dBm (typ.) |
| | 10 GHz ≤ f _{in} ≤ 40 GHz | > 18 dBm, 21 dBm (typ.) |
| | with R&S®FSV-B22 or R&S®FSV-B24 option, RF preamplifier = on, RF attenuation 0 dB, level 2 × -45 dBm, Δf > 5 × RBW or 10 kHz, whichever is larger | |
| | 10 MHz ≤ f _{in} < 100 MHz | -1 dBm (nom.) |
| | 100 MHz ≤ f _{in} < 3.6 GHz | 2 dBm (nom.) |
| | 3.6 GHz ≤ f _{in} < 7 GHz | 0 dBm (nom.) |
| | 7 GHz ≤ f _{in} ≤ 40 GHz | -10 dBm (nom.) |
| Second harmonic intercept (SHI) | RF attenuation 0 dB, level -10 dBm, RF preamplifier = off | |
| | 100 MHz < f _{in} ≤ 3.5 GHz | 45 dBm (nom.) |
| | 3.5 GHz < f _{in} ≤ 20 GHz | |
| | Standard | 80 dBm (nom.) |
| | with R&S®FSV-B24 option | 75 dBm (nom.) |
| | with R&S®FSV-B22 or R&S®FSV-B24 option, RF preamplifier = on, RF attenuation 0 dB, level -40 dBm | |
| | 100 MHz < f _{in} ≤ 3.5 GHz | 25 dBm (nom.) |
| | 3.5 GHz < f _{in} ≤ 20 GHz | 10 dBm (nom.) |

| Displayed average noise level without preamplifier options | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| without R&S®FSVA-B11 option | 0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 5 Hz, VBW = 5 Hz, zero span, sweep time 500 ms, sample detector, trace average, sweep count = 20, mean marker, +20 °C to +30 °C |
| 10 Hz | < -90 dBm (nom.) |
| 20 Hz | < -100 dBm, -110 dBm (typ.) |
| 100 Hz | < -110 dBm, -120 dBm (typ.) |
| 1 kHz | < -120 dBm, -130 dBm (typ.) |
| 0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker, R&S®FSV-B160 option not installed, +20 °C to +30 °C | |
| R&S®FSVA4, R&S®FSVA7 | |
| 9 kHz ≤ f < 100 kHz | < -140 dBm, -146 dBm (typ.) |
| 100 kHz ≤ f < 1 MHz | < -145 dBm, -150 dBm (typ.) |
| 1 MHz ≤ f < 1 GHz | < -152 dBm, -155 dBm (typ.) |
| 1 GHz ≤ f < 3 GHz | < -151 dBm, -153 dBm (typ.) |
| 3 GHz ≤ f < 6 GHz | < -149 dBm, -152 dBm (typ.) |
| 6 GHz ≤ f ≤ 7 GHz | < -148 dBm, -151 dBm (typ.) |
| R&S®FSVA13, R&S®FSVA30 | |
| 9 kHz ≤ f < 100 kHz | < -140 dBm, -146 dBm (typ.) |
| 100 kHz ≤ f < 1 MHz | < -145 dBm, -150 dBm (typ.) |
| 1 MHz ≤ f < 1 GHz | < -151 dBm, -154 dBm (typ.) |
| 1 GHz ≤ f < 3 GHz | < -149 dBm, -152 dBm (typ.) |
| 3 GHz ≤ f < 6 GHz | < -146 dBm, -149 dBm (typ.) |
| 6 GHz ≤ f < 7.4 GHz | < -144 dBm, -147 dBm (typ.) |
| 7.4 GHz ≤ f < 15 GHz | < -148 dBm, -151 dBm (typ.) |
| 15 GHz ≤ f ≤ 30 GHz | < -144 dBm, -147 dBm (typ.) |
| R&S®FSVA40 | |
| 9 kHz ≤ f < 100 kHz | < -140 dBm, -146 dBm (typ.) |
| 100 kHz ≤ f < 1 MHz | < -145 dBm, -150 dBm (typ.) |
| 1 MHz ≤ f < 1 GHz | < -151 dBm, -154 dBm (typ.) |
| 1 GHz ≤ f < 3 GHz | < -149 dBm, -152 dBm (typ.) |
| 3 GHz ≤ f < 6 GHz | < -146 dBm, -149 dBm (typ.) |
| 6 GHz ≤ f < 7.4 GHz | < -144 dBm, -147 dBm (typ.) |
| 7.4 GHz ≤ f < 15 GHz | < -145 dBm, -148 dBm (typ.) |
| 15 GHz ≤ f < 34 GHz | < -142 dBm, -145 dBm (typ.) |
| 34 GHz ≤ f ≤ 40 GHz | < -136 dBm, -139 dBm (typ.) |
| with R&S®FSV-B160 option installed, add 1.5 dB to the above specifications for f > 7 GHz | |
| with R&S®FSVA-B11 option | the specifications "without R&S®FSVA-B11 option" apply, except for the following frequency ranges: |
| R&S®FSVA13, R&S®FSVA30 | |
| 7.4 GHz ≤ f < 15 GHz | < -147 dBm, -150 dBm (typ.) |
| 15 GHz ≤ f ≤ 30 GHz | < -142 dBm, -145 dBm (typ.) |
| R&S®FSVA40 | |
| 7.4 GHz ≤ f < 15 GHz | < -144 dBm, -147 dBm (typ.) |
| 15 GHz ≤ f < 34 GHz | < -140 dBm, -143 dBm (typ.) |
| 34 GHz ≤ f ≤ 40 GHz | < -133 dBm, -136 dBm (typ.) |
| with R&S®FSV-B160 option installed, add 1.5 dB to the above specifications | |

| Displayed average noise level with R&S®FSV-B22 preamplifier option | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RF preamplifier = off , without R&S®FSVA-B11 option | 0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 5 Hz, VBW = 5 Hz, zero span, sweep time 500 ms, sample detector, trace average, sweep count = 20, mean marker, +20 °C to +30 °C |
| 10 Hz | < -90 dBm (nom.) |
| 20 Hz | < -100 dBm, -110 dBm (typ.) |
| 100 Hz | < -110 dBm, -120 dBm (typ.) |
| 1 kHz | < -120 dBm, -130 dBm (typ.) |
| 0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker, R&S®FSV-B160 option not installed, +20 °C to +30 °C | |
| R&S®FSVA4, R&S®FSVA7 | |
| 9 kHz ≤ f < 100 kHz | < -140 dBm, -146 dBm (typ.) |
| 100 kHz ≤ f < 1 MHz | < -145 dBm, -150 dBm (typ.) |
| 1 MHz ≤ f < 1 GHz | < -152 dBm, -155 dBm (typ.) |
| 1 GHz ≤ f < 3 GHz | < -151 dBm, -153 dBm (typ.) |
| 3 GHz ≤ f < 6 GHz | < -149 dBm, -152 dBm (typ.) |
| 6 GHz ≤ f ≤ 7 GHz | < -148 dBm, -151 dBm (typ.) |
| R&S®FSVA13, R&S®FSVA30 | |
| 9 kHz ≤ f < 100 kHz | < -140 dBm, -146 dBm (typ.) |
| 100 kHz ≤ f < 1 MHz | < -145 dBm, -150 dBm (typ.) |
| 1 MHz ≤ f < 1 GHz | < -151 dBm, -154 dBm (typ.) |
| 1 GHz ≤ f < 3 GHz | < -149 dBm, -152 dBm (typ.) |
| 3 GHz ≤ f < 6 GHz | < -146 dBm, -149 dBm (typ.) |
| 6 GHz ≤ f < 7.4 GHz | < -144 dBm, -147 dBm (typ.) |
| 7.4 GHz ≤ f < 15 GHz | < -148 dBm, -151 dBm (typ.) |
| 15 GHz ≤ f ≤ 30 GHz | < -144 dBm, -147 dBm (typ.) |
| R&S®FSVA40 | |
| 9 kHz ≤ f < 100 kHz | < -140 dBm, -146 dBm (typ.) |
| 100 kHz ≤ f < 1 MHz | < -145 dBm, -150 dBm (typ.) |
| 1 MHz ≤ f < 1 GHz | < -151 dBm, -154 dBm (typ.) |
| 1 GHz ≤ f < 3 GHz | < -149 dBm, -152 dBm (typ.) |
| 3 GHz ≤ f < 6 GHz | < -146 dBm, -149 dBm (typ.) |
| 6 GHz ≤ f < 7.4 GHz | < -144 dBm, -147 dBm (typ.) |
| 7.4 GHz ≤ f < 15 GHz | < -145 dBm, -148 dBm (typ.) |
| 15 GHz ≤ f < 34 GHz | < -142 dBm, -145 dBm (typ.) |
| 34 GHz ≤ f ≤ 40 GHz | < -136 dBm, -139 dBm (typ.) |
| with R&S®FSV-B160 option installed, add 1.5 dB to the above specifications for f > 7 GHz | |
| RF preamplifier = off, with R&S®FSVA-B11 option | the above specifications for "RF preamplifier = off, without R&S®FSVA-B11 option" apply, except for the following frequency ranges: |
| R&S®FSVA13, R&S®FSVA30 | |
| 7.4 GHz ≤ f < 15 GHz | < -147 dBm, -150 dBm (typ.) |
| 15 GHz ≤ f ≤ 30 GHz | < -142 dBm, -145 dBm (typ.) |
| R&S®FSVA40 | |
| 7.4 GHz ≤ f < 15 GHz | < -144 dBm, -147 dBm (typ.) |
| 15 GHz ≤ f < 34 GHz | < -140 dBm, -143 dBm (typ.) |
| 34 GHz ≤ f ≤ 40 GHz | < -133 dBm, -136 dBm (typ.) |
| with R&S®FSV-B160 option installed, add 1.5 dB to the above specifications | |
| RF preamplifier = on | 0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker, R&S®FSV-B160 option not installed, +20 °C to +30 °C |
| R&S®FSVA4, R&S®FSVA7 | |
| 100 kHz ≤ f < 1 MHz | < -160 dBm, -163 dBm (typ.) |
| 1 MHz ≤ f < 1 GHz | < -165 dBm, -168 dBm (typ.) |
| 1 GHz ≤ f < 3 GHz | < -163 dBm, -166 dBm (typ.) |
| 3 GHz ≤ f < 6 GHz | < -163 dBm, -166 dBm (typ.) |
| 6 GHz ≤ f ≤ 7 GHz | < -163 dBm, -166 dBm (typ.) |
| R&S®FSVA13, R&S®FSVA30, R&S®FSVA40 | |
| 100 kHz ≤ f < 1 MHz | < -145 dBm, -148 dBm (typ.) |
| 1 MHz ≤ f < 20 MHz | < -160 dBm, -163 dBm (typ.) |
| 20 MHz ≤ f < 1 GHz | < -162 dBm, -165 dBm (typ.) |
| 1 GHz ≤ f < 7 GHz | < -162 dBm, -165 dBm (typ.) |
| with R&S®FSV-B160 option installed, add 1.5 dB to the above specifications for f > 7 GHz | |

| Displayed average noise level with R&S®FSV-B24 preamplifier option | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RF preamplifier = off, without R&S®FSVA-B11 option | 0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 5 Hz, VBW = 5 Hz, zero span, sweep time 500 ms, sample detector, trace average, sweep count = 20, mean marker, +20 °C to +30 °C |
| 10 Hz | < -90 dBm (nom.) |
| 20 Hz | < -100 dBm, -110 dBm (typ.) |
| 100 Hz | < -110 dBm, -120 dBm (typ.) |
| 1 kHz | < -120 dBm, -130 dBm (typ.) |
| 0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker, R&S®FSV-B160 option not installed, +20 °C to +30 °C | |
| R&S®FSVA13, R&S®FSVA30 | |
| 9 kHz ≤ f < 100 kHz | < -140 dBm, -146 dBm (typ.) |
| 100 kHz ≤ f < 1 MHz | < -145 dBm, -150 dBm (typ.) |
| 1 MHz ≤ f < 1 GHz | < -150 dBm, -153 dBm (typ.) |
| 1 GHz ≤ f < 3 GHz | < -147 dBm, -150 dBm (typ.) |
| 3 GHz ≤ f < 6 GHz | < -144 dBm, -147 dBm (typ.) |
| 6 GHz ≤ f < 7.4 GHz | < -141 dBm, -144 dBm (typ.) |
| 7.4 GHz ≤ f < 13.6 GHz | < -145 dBm, -148 dBm (typ.) |
| 13.6 GHz ≤ f < 15 GHz | < -143 dBm, -146 dBm (typ.) |
| 15 GHz ≤ f ≤ 30 GHz | < -141 dBm, -144 dBm (typ.) |
| R&S®FSVA40 | |
| 9 kHz ≤ f < 100 kHz | < -140 dBm, -146 dBm (typ.) |
| 100 kHz ≤ f < 1 MHz | < -145 dBm, -150 dBm (typ.) |
| 1 MHz ≤ f < 1 GHz | < -150 dBm, -153 dBm (typ.) |
| 1 GHz ≤ f < 3 GHz | < -147 dBm, -150 dBm (typ.) |
| 3 GHz ≤ f < 6 GHz | < -144 dBm, -147 dBm (typ.) |
| 6 GHz ≤ f < 7.4 GHz | < -141 dBm, -144 dBm (typ.) |
| 7.4 GHz ≤ f < 13.6 GHz | < -143 dBm, -146 dBm (typ.) |
| 13.6 GHz ≤ f < 15 GHz | < -141 dBm, -144 dBm (typ.) |
| 15 GHz ≤ f < 34 GHz | < -139 dBm, -142 dBm (typ.) |
| 34 GHz ≤ f ≤ 40 GHz | < -132 dBm, -135 dBm (typ.) |
| with R&S®FSV-B160 option installed, add 1.5 dB to the above specifications for f > 7 GHz | |
| RF preamplifier = off, with R&S®FSVA-B11 option | the above specifications for "RF preamplifier = off, without R&S®FSVA-B11 option" apply, except for the following frequency ranges: |
| R&S®FSVA13, R&S®FSVA30 | |
| 7.4 GHz ≤ f < 13.6 GHz | < -144 dBm, -147 dBm (typ.) |
| 13.6 GHz ≤ f < 15 GHz | < -142 dBm, -145 dBm (typ.) |
| 15 GHz ≤ f ≤ 30 GHz | < -139 dBm, -142 dBm (typ.) |
| R&S®FSVA40 | |
| 7.4 GHz ≤ f < 13.6 GHz | < -142 dBm, -145 dBm (typ.) |
| 13.6 GHz ≤ f < 15 GHz | < -140 dBm, -143 dBm (typ.) |
| 15 GHz ≤ f < 34 GHz | < -137 dBm, -140 dBm (typ.) |
| 34 GHz ≤ f ≤ 40 GHz | < -129 dBm, -132 dBm (typ.) |
| with R&S®FSV-B160 option installed, add 1.5 dB to the above specifications for f > 7 GHz | |

| Displayed average noise level with R&S®FSV-B24 preamplifier option | | |
|-------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
| RF preamplifier = on, without R&S®FSVA-B11 option | 0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker, R&S®FSV-B160 option not installed, +20 °C to +30 °C | |
| | 100 kHz ≤ f < 1 MHz | < -145 dBm, -148 dBm (typ.) |
| | 1 MHz ≤ f < 20 MHz | < -160 dBm, -163 dBm (typ.) |
| | 20 MHz ≤ f < 1 GHz | < -162 dBm, -165 dBm (typ.) |
| | 1 GHz ≤ f < 7 GHz | < -162 dBm, -165 dBm (typ.) |
| | 7 GHz ≤ f < 15 GHz | < -164 dBm, -167 dBm (typ.) |
| | 15 GHz ≤ f < 34 GHz | < -159 dBm, -162 dBm (typ.) |
| | 34 GHz ≤ f ≤ 40 GHz | < -154 dBm, -156 dBm (typ.) |
| | with R&S®FSV-B160 option installed, add 1.5 dB to the above specifications for f > 7 GHz | |
| RF preamplifier = on, with R&S®FSVA-B11 option | the above specifications for "RF preamplifier = on, without R&S®FSVA-B11 option" apply, except for the following frequency ranges: YIG preselector = on | |
| | 34 GHz ≤ f ≤ 40 GHz | < -153 dBm, -155 dBm (typ.) |
| | with R&S®FSV-B160 option installed, add 1.5 dB to the above specifications for f > 7 GHz | |
| | YIG preselector = off | |
| | 7 GHz ≤ f < 15 GHz | < -160 dBm, -163 dBm (typ.) |
| | 15 GHz ≤ f < 34 GHz | < -155 dBm, -158 dBm (typ.) |
| | 34 GHz ≤ f ≤ 40 GHz | < -148 dBm, -150 dBm (typ.) |
| | with R&S®FSV-B160 option installed, add 1.5 dB to the above specifications for f > 7 GHz | |

| Spurious responses | | |
|-----------------------------------|----------------------------------------------------------------------|------------------|
| Image response | 20 MHz $\leq f \leq 7$ GHz | |
| | $f_{in} - 2 \times 8413$ MHz (1st IF) | < -80 dBc (nom.) |
| | $f_{in} - 2 \times 733$ MHz (2nd IF) | < -80 dBc |
| | $f_{in} - 2 \times 93$ MHz (3rd IF) | < -80 dBc |
| | 7 GHz $< f \leq 30$ GHz | |
| | $f_{in} \pm 2 \times 729.9$ MHz (1st IF) | < -80 dBc |
| | $f_{in} - 2 \times 89.9$ MHz (2nd IF) | < -80 dBc |
| | 30 GHz $< f \leq 40$ GHz | |
| | $f_{in} \pm 2 \times 729.9$ MHz (1st IF) | < -70 dBc |
| | $f_{in} - 2 \times 89.9$ MHz (2nd IF) | < -80 dBc |
| Intermediate frequency response | 20 MHz $\leq f \leq 7$ GHz | |
| | 1st IF (8413 MHz) | < -80 dBc (nom.) |
| | 2nd IF (733 MHz) | < -80 dBc |
| | 3rd IF (93 MHz) | < -80 dBc |
| | 7 GHz $< f \leq 40$ GHz | |
| | 1st IF (729.9 MHz) | < -80 dBc |
| | 2nd IF (89.9 MHz) | < -80 dBc |
| Residual spurious response | 0 dB RF attenuation | |
| | $f \leq 1$ MHz | < -90 dBm |
| | $f > 1$ MHz | < -103 dBm |
| Local oscillator related spurious | $f < 15$ GHz | |
| | 1 kHz \leq carrier offset ≤ 10 MHz | < -70 dBc |
| | carrier offset > 10 MHz | < -80 dBc |
| | 15 GHz $\leq f < 30$ GHz | |
| | 1 kHz \leq carrier offset ≤ 10 MHz | < -64 dBc |
| | carrier offset > 10 MHz | < -74 dBc |
| | 30 GHz $\leq f \leq 40$ GHz | |
| | 1 kHz \leq carrier offset ≤ 10 MHz | < -58 dBc |
| | carrier offset > 10 MHz | < -68 dBc |
| Other interfering signals | | |
| Subharmonic of 1st LO | 20 MHz $\leq f < 7$ GHz, spurious at 8410 MHz $- 2 \times f_{in}$ | < -80 dBc |
| Harmonic of 1st LO | mixer level < -25 dBm, spurious at $f_{in} - 4205$ MHz | < -80 dBc |

| Level display | | |
|----------------------------------|---------------------------|------------------------------------------------------------------------------------------|
| Logarithmic level axis | | 1 dB to 200 dB, in steps of 1/2/5 |
| Linear level axis | | 10 % of reference level per level division, 10 divisions or logarithmic scaling |
| Number of traces | | 6 |
| Trace detector | | Max Peak, Min Peak, Auto Peak (Normal), Sample, RMS, Average |
| | with R&S®FSV-K54 | Quasi Peak additionally |
| Trace functions | | Clear/Write, Max Hold, Min Hold, Average, View |
| Setting range of reference level | | -130 dBm to (-10 dBm + RF attenuation - RF preamplifier gain), in steps of 0.01 dB |
| Units of level axis | logarithmic level display | dBm, dB μ V, dBmV, dB μ A, dBpW |
| | linear level display | μ V, mV, μ A, mA, pW, nW |

| Level measurement uncertainty | | |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Absolute level uncertainty at 64 MHz | RBW = 10 kHz, level –10 dBm, reference level –10 dBm, RF attenuation 10 dB +20 °C to +30 °C 0 °C to +50 °C | < 0.2 dB ($\sigma = 0.07$ dB) < 0.35 dB ($\sigma = 0.12$ dB) |
| Frequency response referenced to 64 MHz | DC coupling, RF attenuation 10 dB, 20 dB, 30 dB, 40 dB, RF preamplifier = off, +20 °C to +30 °C 9 kHz ≤ f < 10 MHz 10 MHz ≤ f < 3.6 GHz 3.6 GHz ≤ f < 7 GHz 7 GHz ≤ f < 13.6 GHz, span < 1 GHz 13.6 GHz ≤ f < 30 GHz, span < 1 GHz 30 GHz ≤ f ≤ 40 GHz, span < 1 GHz any setting of RF attenuation, RF preamplifier = off, 0 °C to +50 °C 9 kHz ≤ f < 3.6 GHz 3.6 GHz ≤ f < 7 GHz 7 GHz ≤ f < 13.6 GHz 13.6 GHz ≤ f < 30 GHz 30 GHz ≤ f ≤ 40 GHz any setting of RF attenuation, RF preamplifier = on, 0 °C to +50 °C 9 kHz ≤ f < 3.6 GHz 3.6 GHz ≤ f < 7 GHz 7 GHz ≤ f < 13.6 GHz 13.6 GHz ≤ f < 30 GHz 30 GHz ≤ f ≤ 40 GHz DC coupling, RF preamplifier = off, 0 °C to +50 °C 10 Hz ≤ f < 20 Hz 20 Hz ≤ f < 9 kHz | < 0.5 dB ($\sigma = 0.17$ dB) < 0.3 dB ($\sigma = 0.1$ dB) < 0.5 dB ($\sigma = 0.17$ dB) < 1.5 dB ($\sigma = 0.5$ dB) < 2 dB ($\sigma = 0.66$ dB) < 2.5 dB ($\sigma = 0.83$ dB) < 1 dB ($\sigma = 0.33$ dB) < 1.5 dB ($\sigma = 0.5$ dB) < 2.5 dB ($\sigma = 0.83$ dB) < 3 dB ($\sigma = 1$ dB) < 3.5 dB ($\sigma = 1.33$ dB) < 1 dB ($\sigma = 0.33$ dB) < 1.5 dB ($\sigma = 0.5$ dB) < 3 dB ($\sigma = 1$ dB) < 3.5 dB ($\sigma = 1.17$ dB) < 4 dB ($\sigma = 1.33$ dB) |
| Attenuator switching uncertainty | f = 64 MHz, 0 dB to 70 dB, referenced to 10 dB attenuation | < 0.2 dB ($\sigma = 0.07$ dB) |
| Uncertainty of reference level setting | | 0 dB ³ |
| Bandwidth switching uncertainty | referenced to RBW = 10 kHz sweep filters FFT filters | < 0.1 dB ($\sigma = 0.04$ dB) < 0.2 dB ($\sigma = 0.07$ dB) |

| Nonlinearity of displayed level | | |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Logarithmic level display | +5 °C to +40 °C, S/N > 16 dB 0 dB to –70 dB 0 °C to +50 °C, S/N > 16 dB 0 dB to –50 dB –50 dB to –60 dB –60 dB to –70 dB | < 0.1 dB ($\sigma = 0.04$ dB) < 0.1 dB ($\sigma = 0.04$ dB) < 0.1 dB ($\sigma = 0.04$ dB) < 0.15 dB ($\sigma = 0.05$ dB) < 0.2 dB ($\sigma = 0.07$ dB) |
| Linear level display | S/N > 16 dB, 0 dB to –70 dB | 5 % of reference level |

| Total measurement uncertainty | | |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| | signal level 0 dB to –70 dB below reference level, S/N > 20 dB, sweep time auto, sweep type = sweep, RF attenuation 10 dB, 20 dB, 30 dB, 40 dB, RF preamplifier = off, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C | |
| | 9 kHz ≤ f < 10 MHz | 0.39 dB |
| | 10 MHz ≤ f < 3.6 GHz | 0.28 dB |
| | 3.6 GHz ≤ f < 7 GHz | 0.39 dB |
| | 7 GHz ≤ f < 13.6 GHz | 1 dB |
| | 13.6 GHz ≤ f < 30 GHz | 1.32 dB |
| | 30 GHz ≤ f ≤ 40 GHz | 1.65 dB |

³ The setting of the reference level affects only the graphical representation of the measurement result on the display, not the measurement itself. Therefore, the reference level setting causes no additional uncertainty in measurement results.

Measurement speed

| | | |
|----------------------------------------------------------------------------------------|--------------------|------------------------|
| Max. sweep rate, manual operation | | 1 ms (1000/s) (nom.) |
| Max. sweep rate, remote operation ^{4, 5} | trace average = on | 0.9 ms (1100/s) (nom.) |
| Remote measurement and LAN transfer ⁴ | | 2.8 ms (357/s) (nom.) |
| Marker peak search ⁴ | | 1.3 ms (nom.) |
| Center frequency tune + sweep + sweep data transfer via remote control ⁴ | f ≤ 7 GHz | 15 ms (nom.) |
| | f > 7 GHz | 28 ms (nom.) |

Trigger functions

| Trigger | | |
|----------------------------------|------------------------------------|-----------------------------------------------------------------------|
| Trigger source | | free run, video, external, IF power |
| | signal analysis bandwidth > 40 MHz | free run, external |
| Trigger offset | span ≥ 10 Hz | 31.25 ns to 30 s, min. resolution 31.25 ns (or 1 % of offset) |
| | span = 0 Hz | (–sweep time) to 30 s, min. resolution 31.25 ns (or 1 % of offset) |
| Max. deviation of trigger offset | | ±(7.8125 ns + (0.1 % × trigger offset)) |
| IF power trigger | | |
| Sensitivity | min. signal power | –60 dBm + RF attenuation – RF preamplifier gain |
| | max. signal power | –10 dBm + RF attenuation – RF preamplifier gain |
| IF power trigger bandwidth | RBW > 500 kHz, swept | 40 MHz (nom.) |
| | RBW > 20 kHz, FFT | |
| | RBW ≤ 500 kHz, swept | 6 MHz (nom.) |
| | RBW ≤ 20 kHz, FFT | |
| Gated sweep | | |
| Gate source | | video, external, IF power |
| Gate delay | | 31.25 ns to 30 s, min. resolution 31.25 ns (or 1 % of delay) |
| Gate length | | 31.25 ns to 30 s, min. resolution 31.25 ns (or 1 % of gate length) |
| Max. deviation of gate length | | ±(7.8125 ns + (0.1 % × gate length)) |

⁴ Measured with personal computer equipped with Intel® Core™2 Duo 2.13 GHz and Gbit LAN interface.

⁵ Measurement is performed with a sweep count of 1000. The indicated speed is the average speed of 1 sweep.

I/Q data

| | | |
|--------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| Interface | | GPIB or LAN interface |
| Memory length | | max. 200 Msample I and Q |
| Word length of I/Q samples | sampling rate > 64 MHz or number of samples > 100 Msample otherwise | 18 bit 24 bit |
| Sampling rate | | 100 Hz to 45 MHz with R&S®FSVA-B40 option 100 Hz to 128 MHz with R&S®FSV-B160 option 100 Hz to 400 MHz |
| Max. signal analysis bandwidth (equalized) | f ≤ 7 GHz standard with R&S®FSVA-B40 option with R&S®FSV-B160 option | 28 MHz 40 MHz 160 MHz |
| | For f > 7 GHz R&S®FSVA-B11 option is required to obtain the above signal analysis bandwidths. The YIG preselector must be set = off in this case. | |

| Signal analysis bandwidth ≤ 40 MHz⁶ | | |
|-------------------------------------------------------|---------------------------------------------------------------------------|---------------------------------------------|
| R&S®FSVA4/R&S®FSVA7, +20 °C to +30 °C | | |
| Amplitude flatness | | ±0.3 dB (nom.) |
| Deviation from linear phase | | ±1° (nom.) |
| R&S®FSVA13/R&S®FSVA30/R&S®FSVA40, +20 °C to +30 °C | | |
| Amplitude flatness | f ≥ 50 MHz | ±0.5 dB (nom.) |
| Deviation from linear phase | 50 MHz ≤ f ≤ 7 GHz | ±1.5° (nom.) |
| | f > 7 GHz | ±3.5° (nom.) |
| Nonlinearity of displayed level | | see section Nonlinearity of displayed level |
| Level measurement uncertainty (at center frequency) | | see section Total measurement uncertainty |
| Displayed average noise level (at center frequency) | | see section Displayed average noise level |
| ADC related third-order intermodulation distortion | f ≥ 100 MHz two –30 dBm tones at input mixer within analysis bandwidth | –80 dBc (nom.) |
| Residual spurious response | RF attenuation 0 dB, f ≥ 100 MHz | –90 dBm (nom.) |
| Other spurious responses | | see section Spurious responses |

⁶ R&S®FSVA-B40 or R&S®FSV-B160 option are required for signal analysis bandwidths > 28 MHz. For f > 7 GHz R&S®FSVA-B11 option is required additionally and YIG preselector = off must be set.

| Signal analysis bandwidth 40 MHz to 160 MHz ⁷ | | |
|-----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| $+20^{\circ}\text{C}$ to $+30^{\circ}\text{C}$ | | |
| Amplitude flatness | RF attenuation ≥ 10 dB, RF preamplifier = off | |
| | 100 MHz $\leq f < 4$ GHz | ± 0.5 dB (nom.) ⁸ |
| | 4 GHz $\leq f < 6$ GHz | ± 0.6 dB (nom.) ⁸ |
| | 6 GHz $\leq f \leq 7$ GHz | ± 0.7 dB (nom.) ⁸ |
| | $f > 7$ GHz | ± 2 dB (nom.) ⁸ |
| Deviation from linear phase | RF attenuation ≥ 10 dB, RF preamplifier = off | |
| | 100 MHz $\leq f < 4$ GHz | $\pm 2^{\circ}$ (nom.) ⁹ |
| | 4 GHz $\leq f < 6$ GHz | $\pm 2.5^{\circ}$ (nom.) ⁹ |
| | 6 GHz $\leq f \leq 25$ GHz | $\pm 3^{\circ}$ (nom.) ⁹ |
| | $f > 25$ GHz | $\pm 4^{\circ}$ (nom.) ⁹ |
| Nonlinearity of displayed level | 0 dB to -70 dB | < 0.15 dB (nom.) |
| Level measurement uncertainty (at center frequency) | | add 0.2 dB (nom.) to the values in section Total measurement uncertainty |
| Displayed average noise level (at center frequency) | | add 5 dB (nom.) to the values in section Displayed average noise level |
| ADC related third-order intermodulation distortion | $f \geq 100$ MHz two -30 dBm tones at input mixer within analysis bandwidth | -65 dBc (nom.) |
| Residual spurious response | RF attenuation 0 dB, $f \geq 100$ MHz | -90 dBm (nom.) |
| Image response | $f \geq 100$ MHz | -65 dBc (nom.) |
| ADC related spurious response | $f \geq 100$ MHz mixer level = -20 dBm reference level = signal level single tone within analysis bandwidth | -65 dBc (nom.) |
| Other spurious responses | | see section Spurious responses |

⁷ Requires R&S®FSV-B160 option, and R&S®FSVA-B11 option, YIG preselector = off for $f > 7$ GHz additionally.

⁸ With R&S®FSV-B24 option installed, add 0.2 dB to the specifications.

⁹ With R&S®FSV-B24 option installed, add 1° to the specifications.

Inputs and outputs

| RF input | | |
|----------------------------------------|-----------------------------------------|----------------------------------------|
| Impedance | | 50 Ω |
| Connector | R&S®FSVA4, R&S®FSVA7, R&S®FSVA13 | N female |
| | R&S®FSVA30 | APC 3.5 mm/N female test port adapter |
| | R&S®FSVA40 | 2.92 mm (K)/N female test port adapter |
| VSWR | RF attenuation ≥ 10 dB | |
| | 10 MHz $\leq f < 3.6$ GHz | < 1.5, 1.3 (typ.) |
| | 3.6 GHz $\leq f < 20$ GHz | < 2, 1.8 (typ.) |
| | 20 GHz $\leq f < 27$ GHz | < 2.2, 2 (typ.) |
| | 27 GHz $\leq f < 30$ GHz | |
| | DC coupled | < 2.2, 2 (typ.) |
| | AC coupled | 2.5 (meas.) |
| | 30 GHz $\leq f \leq 40$ GHz | |
| | DC coupled | < 2.5, 2.2 (typ.) |
| | AC coupled | 3 (meas.) |
| | RF attenuation < 10 dB, DC coupled | |
| | 10 MHz $\leq f < 7$ GHz | 2 (meas.) |
| | 7 GHz $\leq f < 30$ GHz | 2.5 (meas.) |
| | 30 GHz $\leq f \leq 40$ GHz | 3 (meas.) |
| Setting range of attenuator | standard | 0 dB to 75 dB, in 1 dB steps |
| Setting range of electronic attenuator | with R&S®FSV-B25 option, $f \leq 7$ GHz | 0 dB to 25 dB, in 1 dB steps |
| RF preamplifier gain | with R&S®FSV-B22 option | 20 dB (nom.) |
| | with R&S®FSV-B24 option | |
| | $f \leq 7$ GHz | 20 dB (nom.) |
| | $f > 7$ GHz | 30 dB (nom.) |

| Probe power supply | | |
|---------------------------|--|--------------------------------------------------------|
| Supply voltages | | +15 V DC, -12.6 V DC and ground, max. 150 mA (nom.) |

| Noise source drive | | |
|---------------------------|--|------------------------------------------|
| Connector | | BNC female |
| Output voltage | | 0 V/28 V, switchable, max. 100 mA (nom.) |

| Power sensor | | |
|---------------------|--|----------------------------------------------------------------|
| Connector | | 6-pin LEMOSA female for supported R&S®NRP-Zxx power sensors |

| USB interface | | |
|----------------------|--|-----------------------------------|
| | | 2 ports, type A plug, version 2.0 |

| Reference output | | |
|-------------------------|--------------------|--------------------------------|
| Connector | | BNC female |
| Impedance | | 50 Ω |
| Output frequency | internal reference | 10 MHz |
| | external reference | same as reference input signal |
| Level | | > 0 dBm (nom.) |

| Reference input | | |
|------------------------|--|---------------------------------------------------|
| Connector | | BNC female |
| Impedance | | 50 Ω |
| Input frequency range | | 1 MHz $\leq f_{in} \leq 20$ MHz, in 100 kHz steps |
| Required level | | > 0 dBm into 50 Ω |

| External trigger/gate input | | |
|------------------------------------|--|--------------------------------------------------|
| Connector | | BNC female |
| Trigger voltage | | 0.5 V to 3.5 V |
| Input impedance | | 10 kΩ |
| IEC/IEEE bus control | | |
| Command set | | interface in line with IEC 625-2 (IEEE 488.2) |
| Connector | | SCPI 1997.0 |
| Interface functions | | 24-pin Amphenol female |
| | | SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0 |
| LAN interface | | |
| Connector | | 10/100/1000BASE-T |
| | | RJ-45 |
| External monitor | | |
| Connector | | VGA-compatible, 15-pin, mini D-Sub |

General data

| | | |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Display | 21 cm LC TFT color display (8.4") | |
| Resolution | 800 × 600 pixel (SVGA resolution) | |
| Pixel failure rate | < 1 × 10 ⁻⁵ | |
| Data storage | | |
| Internal | standard | solid-state drive ≥ 60 Gbyte (nom.) |
| External | | supports USB-2.0-compatible memory devices |
| Environmental conditions | | |
| Temperature | operating temperature range storage temperature range | +0 °C to +50 °C −40 °C to +70 °C |
| Climatic loading | | +40 °C at 90 % rel. humidity, in line with EN 60068-2-30, without condensation |
| Mechanical resistance | | |
| Vibration | sinusoidal | 5 Hz to 55 Hz 0.15 mm constant amplitude (1.8 g at 55 Hz); 55 Hz to 150 Hz acceleration: 0.5 g constant; in line with EN 60068-2-6 |
| | random | 10 Hz to 300 Hz, acceleration 1.2 g (RMS), in line with EN 60068-2-64 |
| Shock | | 40 g shock spectrum, in line with MIL-STD-810E Method No. 516.4 Procedure I, MIL-PRF-28800F |
| EMC | in line with EMC Directive 2004/108/EC including: IEC/EN 61326-1 ^{10, 11} , IEC/EN 61326-2-1, CISPR 11/EN 55011 ¹⁰ , IEC/EN 61000-3-2, IEC/EN 61000-3-3 | |
| Recommended calibration interval | 2 years | |
| Power supply | | |
| AC supply | | 100 V to 240 V, 3 A to 1.25 A; 50 Hz to 400 Hz, class of protection I in line with VDE 411 |
| Power consumption | R&S®FSVA4, R&S®FSVA7 R&S®FSVA13, R&S®FSVA30, R&S®FSVA40 | 90 W (nom.), max. 180 W with all options 115 W (nom.), max. 180 W with all options |
| Safety | | in line with EN 61010-1, IEC 61010-1, UL 61010-1, CAN/CSA-C22.2 No. 61010-1 |
| Test mark | | VDE, GS, CSA, CSA-NRTL |
| Dimensions and weight | | |
| Dimensions | W × H × D | 412 mm × 197 mm × 417 mm (16.22 in × 7.76 in × 16.42 in) |
| Net weight without options, nominal | R&S®FSVA4, R&S®FSVA7 R&S®FSVA13 R&S®FSVA30 R&S®FSVA40 | 9.5 kg (20.94 lb) 10.3 kg (22.7 lb) 10.7 kg (23.58 lb) 11.1 kg (24.46 lb) |

¹⁰ Emission limits for class A equipment.¹¹ Immunity test requirement for industrial environment (EN 61326 table 2).

Options

R&S®FSV-B3 audio demodulator

| Demodulation | |
|-----------------------------------|----------------------------|
| AF demodulation types | AM and FM |
| Audio output | loudspeaker and phone jack |
| Marker stop time in spectrum mode | 100 ms to 60 s |

| AF output | |
|----------------------|-------------------------|
| Connector | 3.5 mm mini jack |
| Output impedance | 10 Ω |
| Open-circuit voltage | up to 1.5 V, adjustable |

R&S®FSV-B5 additional interfaces

| User port | |
|------------------|-------------------------------------|
| Connector | 9-pin D-Sub male |
| Output | TTL-compatible, 0 V/5 V, max. 15 mA |
| Input | TTL-compatible, max. 5 V |

| IF/video/demod out | |
|-------------------------------------|-------------------------------------------------------------------------------------------|
| Connector | BNC female, 50 Ω |
| IF out | |
| Bandwidth | equal to RBW setting |
| IF frequency | 32 MHz |
| Output level (gain versus RF input) | RF attenuation 0 dB, RF preamplifier = off, span = 0 Hz |
| Video out | |
| Bandwidth | equal to VBW setting |
| Output scaling | log. display scale lin. display scale |
| Output level | center frequency > 10 MHz, span = 0 Hz, signal at reference level and center frequency |

| Trigger out | |
|--------------------|-------------------------|
| Connector | BNC female |
| Output | TTL-compatible, 0 V/5 V |

| | |
|----------------------|-----------------------------------|
| USB interface | 2 ports, type A plug, version 2.0 |
|----------------------|-----------------------------------|

R&S®FSV-B9 tracking generator

| Frequency | | |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| Frequency range | R&S®FSVA4 | 100 kHz to 4 GHz |
| | R&S®FSVA7, R&S®FSVA13, R&S®FSVA30, R&S®FSVA40 | 100 kHz to 7 GHz |
| Frequency offset | | |
| Setting range | | ±1 GHz |
| Setting resolution | | 1 Hz |
| Spectral purity | | |
| SSB phase noise | frequency = 1000 MHz, carrier offset = 100 kHz | -90 dBc (1 Hz) (nom.) |
| Level | | |
| Setting range | normal mode | -60 dBm to 0 dBm, in 0.1 dB steps |
| | with AM, I/Q | -60 dBm to -10 dBm, in 0.1 dB steps |
| Max. deviation of output level | frequency = 64 MHz, +20 °C to +30 °C, output level = -10 dBm, frequency offset = 0 Hz, modulation = off | < 1 dB |
| Frequency response | output level = -10 dBm, referenced to level at 64 MHz, 100 kHz ≤ f ≤ 7 GHz, frequency offset = 0 Hz, modulation = off | < 3 dB |
| Dynamic range | | |
| | RBW = 1 kHz, f > 10 MHz | 110 dB |
| Harmonics, non-harmonic spurious | | |
| | output level = -10 dBm | -30 dBc |
| Modulation | | |
| Modulation format | external | I/Q, AM, FM |
| AM | f > 10 MHz | |
| | modulation depth | 0 % to 100 % |
| | modulation frequency range | 0 Hz to 1 MHz |
| FM | f > 10 MHz | |
| | modulation depth | 0 Hz to 10 MHz |
| | modulation frequency range | 0 Hz to 10 kHz |
| RF output | | |
| Connector | | N female, 50 Ω |
| VSWR | | 1.3 (nom.) |
| TG I/AM IN | | |
| Connector | | BNC female, 50 Ω |
| Input voltage | | 1 V (pp) |
| TG Q/FM IN | | |
| Connector | | BNC female, 50 Ω |
| Input voltage | | 1 V (pp) |

R&S®FSV-B10 external generator control

| Interface | |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IEC/IEEE bus control | 24-pin Amphenol female |
| Aux control | 9-pin D-Sub female |
| Supported signal generators | |
| | R&S®SGS100A, R&S®SGT100A, R&S®SMA100A, R&S®SMB100A, R&S®SMBV100A, R&S®SMC100A, R&S®SME, R&S®SMF100A, R&S®SMG, R&S®SMGL, R&S®SMGU, R&S®SMH, R&S®SMHU, R&S®SMIQ, R&S®SMJ100A, R&S®SML, R&S®SMP, R&S®SMR, R&S®SMT, R&S®SMU200A, R&S®SMV03, R&S®SMW200A, R&S®SMX, R&S®SMY |

R&S®FSV-B17 digital baseband interface

| I/Q data IN | |
|----------------------|-------------------------------------------|
| Connector | 26-pin female Mini D Ribbon |
| Data lines | number of data lines (differential lines) |
| | 8 |
| | bit rate (on each data line) |
| | 396 MHz to 600 MHz |
| | level |
| Clock | LVDS |
| | clock rate |
| | 66 MHz to 100 MHz |
| Communications lines | level |
| | LVDS |
| | bidirectional 2-wire interface |
| | level |
| | 3.3 V |

| I/Q data OUT | |
|----------------------|-------------------------------------------|
| Connector | 26-pin female Mini D Ribbon |
| Data lines | number of data lines (differential lines) |
| | 8 |
| | bit rate (on each data line) |
| | 600 MHz |
| | level |
| Clock | LVDS |
| | clock rate |
| | 100 MHz |
| | level |
| Communications lines | LVDS |
| | bidirectional 2-wire interface |
| | level |
| | 3.3 V |

R&S®FSV-B21 LO/IF ports for external mixers (for R&S®FSVA30 and R&S®FSVA40 only)

| LO signal | |
|-----------------|-----------------------|
| Frequency range | 7.73 GHz to 15.23 GHz |
| Level | +20 °C to +30 °C |
| | +15.5 dBm ± 1 dB |
| | +5 °C to +40 °C |
| | +15.5 dBm ± 3 dB |

| IF input | |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| IF frequency | 729.9 MHz |
| Full-scale level | 2-port mixer (LO output/IF input, front panel) 3-port mixer (IF input, front panel) |
| | -20 dBm |
| Level uncertainty | IF input level –30 dBm, RBW 30 kHz, 2-port mixer, LO output/IF input (front panel) +20 °C to +30 °C < 1 dB +5 °C to +40 °C < 3 dB |
| | IF input level –30 dBm, RBW 30 kHz, 3-port mixer, IF input (front panel) +20 °C to +30 °C < 1 dB +5 °C to +40 °C < 3 dB |

| Inputs and outputs | |
|--------------------|------------------|
| LO output/IF input | SMA female, 50 Ω |
| IF input | SMA female, 50 Ω |

R&S®FSV-B30 DC power supply for 12 V/24 V supply voltage

| | | |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| Input voltage range | | 10 V to 28 V |
| Output voltage | | 120 V to 360 V DC |
| Input current | $V_{in} = 12 \text{ V}$, instrument without options, preset settings R&S®FSVA4, R&S®FSVA7 R&S®FSVA13, R&S®FSVA30, R&S®FSVA40 | 10 A (nom.) 13 A (nom.) |
| Temperature | operating temperature range storage temperature range | 0 °C to +50 °C –40 °C to +70 °C |
| Dimensions | W × H × D | 201 mm × 125 mm × 56 mm (7.91 in × 4.92 in × 2.20 in) |
| Net weight | | 1 kg (2.2 lb) |

R&S®FSV-B32 Lithium-ion battery pack

| | | |
|----------------|------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|
| Output voltage | | 12 V (nom.) |
| Operating time | instrument without options, preset settings | 2 h (nom.) |
| Charge time | with R&S®FSV-B34 charger, T = +25 °C | 3.5 h (nom.) |
| Temperature | operating temperature range, discharge operating temperature range, charge storage temperature range | 0 °C to +50 °C 0 °C to +45 °C –20 °C to +60 °C ¹² |
| Dimensions | W × H × D | 406 mm × 71 mm × 241 mm (16 in × 2.76 in × 9.49 in) |
| Net weight | | 3.4 kg (7.5 lb) |

R&S®FSV-B34 charger for R&S®FSV-B32 battery pack

| | | |
|------------------------|-----------|------------------------------------------------------|
| AC input voltage range | | 100 V to 240 V, ±10 % (nom.) |
| AC supply frequency | | 50 Hz to 60 Hz (nom.) |
| Power consumption | | max. 300 W (nom.) |
| Dimensions | W × H × D | 400 mm × 127 mm × 203 mm (15.75 in × 5 in × 8 in) |
| Net weight | | 3.1 kg (6.9 lb) |

¹² The battery packs should be stored in an environment with low humidity, free from corrosive gas at a recommended temperature range < +21 °C.
Extended exposure to temperatures above +45°C could degrade battery performance and life.

Ordering information

| Designation | Type | Order No. |
|------------------------------|--------------------------|--------------|
| Signal and Spectrum Analyzer | R&S®FSVA4 | 1321.3008.05 |
| Signal and Spectrum Analyzer | R&S®FSVA7 | 1321.3008.08 |
| Signal and Spectrum Analyzer | R&S®FSVA13 | 1321.3008.14 |
| Signal and Spectrum Analyzer | R&S®FSVA30 | 1321.3008.31 |
| Signal and Spectrum Analyzer | R&S®FSVA40 ¹³ | 1321.3008.41 |

| Accessories supplied | | |
|-------------------------------------------------------------------------------------------------------------|--|--|
| Power cable, quick start guide and CD-ROM (with operating manual and service manual) | | |
| R&S®FSVA30: test port adapter with 3.5 mm female (1021.0512.00) and N female (1021.0535.00) connectors | | |
| R&S®FSVA40: test port adapter with 2.92 mm (K) female (1036.4790.00) and N female (1036.4777.00) connectors | | |

Options

| Designation | Type | Order No. | Retrofittable | Remarks |
|----------------------------------------------|--------------|--------------|---------------|------------------------------------------------------------------------------------------|
| Ruggedized Housing | R&S®FSV-B1 | 1310.9500.02 | no | |
| Audio Demodulator | R&S®FSV-B3 | 1310.9516.02 | yes | retrofit in service center |
| OCXO Reference Frequency | R&S®FSV-B4 | 1310.9522.02 | yes | user-retrofittable |
| OCXO Extended Frequency Stability | R&S®FSV-B4 | 1310.9522.03 | yes | user-retrofittable |
| Additional Interfaces | R&S®FSV-B5 | 1310.9539.02 | yes | IF out, video out, AUX port, trigger out, 2 x USB |
| Tracking Generator (100 kHz to 7 GHz) | R&S®FSV-B9 | 1310.9545.02 | yes | retrofit in service center |
| External Generator Control | R&S®FSV-B10 | 1310.9551.02 | yes | retrofit in service center, excludes R&S®FSV-B160 |
| YIG Preselector Bypass | R&S®FSVA-B11 | 1321.3714.13 | no | for R&S®FSVA13 |
| YIG Preselector Bypass | R&S®FSVA-B11 | 1321.3714.30 | no | for R&S®FSVA30 |
| YIG Preselector Bypass | R&S®FSVA-B11 | 1321.3714.40 | no | for R&S®FSVA40 |
| Ultra-High Precision Frequency Reference | R&S®FSV-B14 | 1310.9980.02 | yes | retrofit in service center, excludes R&S®FSV-B160 |
| Digital Baseband Interface | R&S®FSV-B17 | 1310.9568.02 | yes | user-retrofittable, for details ask service center |
| Solid-State Drive (removable hard drive) | R&S®FSV-B18 | 1310.9697.06 | yes | user-retrofittable |
| LO/IF Ports for External Mixers | R&S®FSV-B21 | 1310.9597.02 | no | |
| RF Preamplifier (9 kHz to 7 GHz) | R&S®FSV-B22 | 1310.9600.02 | yes | user-retrofittable |
| RF Preamplifier (9 kHz to 13.6 GHz) | R&S®FSV-B24 | 1310.9616.13 | no | |
| RF Preamplifier (9 kHz to 30 GHz) | R&S®FSV-B24 | 1310.9616.30 | no | |
| RF Preamplifier (9 kHz to 40 GHz) | R&S®FSV-B24 | 1310.9616.40 | no | |
| Electronic Attenuator, 1 dB steps | R&S®FSV-B25 | 1310.9622.02 | yes | user-retrofittable |
| DC power supply for 12 V/24 V supply voltage | R&S®FSV-B30 | 1329.0243.02 | yes | user-retrofittable |
| Lithium-Ion Battery Pack | R&S®FSV-B32 | 1321.3750.04 | yes | user-retrofittable, requires R&S®FSV-B1, R&S®FSV-B30 and R&S®FSV-B34 |
| USB Mass Memory Write Protection | R&S®FS-B33 | 1309.5991.02 | no | pre-installation ex factory |
| Lithium-Ion Battery Charger | R&S®FSV-B34 | 1321.3950.02 | yes | user-retrofittable |
| 40 MHz Analysis Bandwidth | R&S®FSVA-B40 | 1329.0214.02 | yes | user-retrofittable, for frequencies ≤ 7 GHz, with option R&S®FSVA-B11 also for f > 7 GHz |
| 160 MHz Analysis Bandwidth | R&S®FSV-B160 | 1311.2015.02 | yes | for R&S®FSVA4 and R&S®FSVA7, excludes R&S®FSV-B10 and R&S®FSV-B14 |

¹³ Max. bandwidth 10 MHz.

| Designation | Type | Order No. | Retrofittable | Remarks |
|----------------------------------------------------------|----------------|--------------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 160 MHz Analysis Bandwidth | R&S®FSV-B160 | 1311.2015.13 | yes | for R&S®FSVA13, for frequencies \leq 7 GHz, with option R&S®FSVA-B11 (not retrofittable) also for $f >$ 7 GHz, excludes R&S®FSV-B10 and R&S®FSV-B14 |
| 160 MHz Analysis Bandwidth | R&S®FSV-B160 | 1311.2015.40 | yes | for R&S®FSVA30 and R&S®FSVA40 for frequencies \leq 7 GHz, with option R&S®FSVA-B11 (not retrofittable) also for $f >$ 7 GHz, excludes R&S®FSV-B10 and R&S®FSV-B14 |
| Firmware/software | | | | |
| Analog Modulation Analysis for AM, FM, φ M | R&S®FSV-K7 | 1310.8103.02 | | |
| Bluetooth®/EDR Measurements | R&S®FSV-K8 | 1310.8155.02 | | |
| Power Sensor Measurement with R&S®NRP Power Sensors | R&S®FSV-K9 | 1310.8203.02 | | supports R&S®NRP-Zxx power sensors |
| Analysis of GSM, EDGE and EDGE Evolution Signals | R&S®FSV-K10 | 1310.8055.02 | | |
| Spectrogram Measurements | R&S®FSV-K14 | 1310.8255.02 | | |
| Noise Figure and Gain Measurements | R&S®FSV-K30 | 1310.8355.02 | | |
| Phase Noise Measurement Application | R&S®FSV-K40 | 1310.8403.02 | | |
| EMI Measurement Application | R&S®FSV-K54 | 1310.0425.02 | | |
| CISPR Calibration for R&S®FSV-K54 (ISO 17025) | R&S®FSV-K54CAL | 1329.0237.02 | | requires R&S®FSV-K54 |
| Vector Signal Analysis | R&S®FSV-K70 | 1310.8455.02 | | |
| Analysis of 3GPP FDD Base Station Signals incl. HSPA+ | R&S®FSV-K72 | 1310.8503.02 | | |
| 3GPP FDD UE Analysis incl. HSPA+ | R&S®FSV-K73 | 1310.8555.02 | | |
| 3GPP TD-SCDMA BTS Measurements | R&S®FSV-K76 | 1310.8603.02 | | |
| TD-SCDMA UE Measurements | R&S®FSV-K77 | 1310.8655.02 | | |
| Analysis of CDMA2000® Base Station Signals | R&S®FSV-K82 | 1310.8703.02 | | |
| CDMA2000® MS Measurements | R&S®FSV-K83 | 1310.8755.02 | | |
| Analysis of 1xEV-DO Base Station Signals | R&S®FSV-K84 | 1310.8803.02 | | |
| 1xEV-DO MS Measurements | R&S®FSV-K85 | 1310.8778.02 | | |
| Analysis of WLAN 802.11a, b, g, j Signals | R&S®FSV-K91 | 1310.8903.02 | | |
| WLAN 802.11ac Measurement Application | R&S®FSV-K91AC | 1310.8926.02 | | requires R&S®FSV-B160 |
| Extension of R&S®FSV-K91 to 802.11n | R&S®FSV-K91N | 1310.9468.02 | | requires R&S®FSVA-B40 or R&S®FSVA-B160 |
| WLAN 802.11p Measurement Application | R&S®FSV-K91P | 1321.3314.02 | | requires R&S®FSVA-B40 or R&S®FSVA-B160, and R&S®FSV-K91 |
| Analysis of EUTRA/LTE FDD Downlink Signals | R&S®FSV-K100 | 1310.9051.02 | | |
| Analysis of EUTRA/LTE FDD Uplink Signals | R&S®FSV-K101 | 1310.9100.02 | | |
| EUTRA/LTE Downlink MIMO Measurements | R&S®FSV-K102 | 1310.9151.02 | | requires R&S®FSV-K100 or R&S®FSV-K104 |
| EUTRA/LTE Uplink MIMO, PC software for R&S®FSV | R&S®FSV-K103 | 1310.9200.02 | | requires R&S®FSV-K101 or R&S®FSV-K105 |
| Analysis of EUTRA/LTE TDD Downlink Signals | R&S®FSV-K104 | 1309.9774.02 | | |
| Analysis of EUTRA/LTE TDD Uplink Signals | R&S®FSV-K105 | 1309.9780.02 | | |

Recommended extras

| Designation | Type | Order No. |
|------------------------------------------------------------------------------------------------------|---------------------------|---------------------------------------|
| Headphones | | 0708.9010.00 |
| IEC/IEEE Bus Cable, length: 1 m | R&S®PCK | 0292.2013.10 |
| IEC/IEEE Bus Cable, length: 2 m | R&S®PCK | 0292.2013.20 |
| 19" Rack Adapter (not for R&S®FSV-B1) | R&S®ZZA-478 | 1096.3248.00 |
| 19" Rack Adapter, pre-installed ex factory (not for R&S®FSV-B1) | R&S®FSV-B478 | 1310.9951.02 |
| Soft Carrying Case (gray) | R&S®ZZT-473 | 1109.5048.00 |
| Matching pads, 50/75 Ω | | |
| L Section, matching at both ends | R&S®RAM | 0358.5414.02 |
| Series Resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω) | R&S®RAZ | 0358.5714.02 |
| SWR bridges, 50 Ω | | |
| SWR Bridge, 5 MHz to 3 GHz | R&S®ZRB2 | 0373.9017.5x |
| SWR Bridge, 40 kHz to 4 GHz | R&S®ZRC | 1039.9492.5x |
| High-power attenuators | | |
| Attenuator 100 W, 3/6/10/20/30 dB, 1 GHz | R&S®RBU100 | 1073.8495.xx (xx = 03/06/10/20/30) |
| Attenuator 50 W, 3/6/10/20/30 dB, 2 GHz | R&S®RBU50 | 1073.8695.xx (xx = 03/06/10/20/30) |
| Attenuator 50 W, 20 dB, 6 GHz | R&S®RDL50 | 1035.1700.52 |
| Connectors and cables | | |
| N-type Adapter for R&S®RT-Zx probes | R&S®RT-ZA9 | 1417.0909.02 |
| Probe Power Connector, 3-pin | | 1065.9480.00 |
| LVDS Cable for connecting digital baseband interfaces | R&S®SMU-Z6 | 1415.0201.02 |
| DC blocks | | |
| DC Block, 10 kHz to 18 GHz (type N) | R&S®FSE-Z4 | 1084.7443.02 |
| External harmonic mixers (for R&S®FSVA30/FSVA40 with R&S®FSV-B21 option) | | |
| Harmonic Mixer, 40 GHz to 60 GHz | R&S®FS-Z60 | 1089.0799.02 |
| Harmonic Mixer, 50 GHz to 75 GHz | R&S®FS-Z75 | 1048.0271.02 |
| Harmonic Mixer, 60 GHz to 90 GHz | R&S®FS-Z90 | 1048.0371.02 |
| Harmonic Mixer, 75 GHz to 110 GHz | R&S®FS-Z110 | 1048.0471.02 |
| Harmonic Mixer, 90 GHz to 140 GHz | RPG FS-Z140 ¹⁴ | 3622.0708.02 |
| Harmonic Mixer, 110 GHz to 170 GHz | RPG FS-Z170 ¹⁴ | 3622.0714.02 |
| Harmonic Mixer, 140 GHz to 220 GHz | RPG FS-Z220 ¹⁴ | 3593.3250.02 |
| Harmonic Mixer, 220 GHz to 325 GHz | RPG FS-Z325 ¹⁴ | 3593.3267.02 |
| Harmonic Mixer, 325 GHz to 500 GHz | RPG FS-Z500 ¹⁴ | 3593.3273.02 |
| For R&S®FSVA30 only | | |
| Test Port Adapter, N male | | 1021.0541.00 |
| Test Port Adapter, 3.5 mm male | | 1021.0529.00 |
| Microwave Measurement Cable with test port adapter set (N male and 3.5 mm male) | R&S®FSE-Z15 | 1046.2002.02 |
| For R&S®FSVA40 only | | |
| Test Port Adapter, N male | | 1036.4783.00 |
| Test Port Adapter, K male | | 1036.4802.00 |
| Test Port Adapter, 2.4 mm female | R&S®FSE-Z5 | 1088.1627.02 |

¹⁴ RPG is the abbreviation of Radiometer Physics GmbH, a Rohde & Schwarz company

Power sensors supported by the R&S®FSV-K9 option¹⁵

| Designation | Type | Order No. |
|-------------------------------------------------|--------------|--------------|
| Universal power sensors | | |
| 10 MHz to 8 GHz, 100 mW, two-path | R&S®NRP-Z211 | 1417.0409.02 |
| 10 MHz to 8 GHz, 200 mW | R&S®NRP-Z11 | 1138.3004.02 |
| 10 MHz to 18 GHz, 100 mW, two-path | R&S®NRP-Z221 | 1417.0309.02 |
| 10 MHz to 18 GHz, 200 mW | R&S®NRP-Z21 | 1137.6000.02 |
| 10 MHz to 18 GHz, 2 W | R&S®NRP-Z22 | 1137.7506.02 |
| 10 MHz to 18 GHz, 15 W | R&S®NRP-Z23 | 1137.8002.02 |
| 10 MHz to 18 GHz, 30 W | R&S®NRP-Z24 | 1137.8502.02 |
| Power sensor modules with power splitter | | |
| DC to 18 GHz, 500 mW | R&S®NRP-Z27 | 1169.4102.02 |
| DC to 26.5 GHz, 500 mW | R&S®NRP-Z37 | 1169.3206.02 |
| Thermal power sensors | | |
| 0 Hz to 18 GHz, 100 mW | R&S®NRP-Z51 | 1138.0005.02 |
| 0 Hz to 40 GHz, 100 mW | R&S®NRP-Z55 | 1138.2008.02 |
| 0 Hz to 50 GHz, 100 mW | R&S®NRP-Z56 | 1171.8201.02 |
| 0 Hz to 67 GHz, 100 mW | R&S®NRP-Z57 | 1171.8401.02 |
| 0 Hz to 110 GHz, 100 mW | R&S®NRP-Z58 | 1173.7031.02 |
| Average power sensors | | |
| 9 kHz to 6 GHz, 200 mW | R&S®NRP-Z91 | 1168.8004.02 |
| 9 kHz to 6 GHz, 2 W | R&S®NRP-Z92 | 1171.7005.02 |
| Three-path diode power sensors | | |
| 100 pW to 200 mW, 10 MHz to 8 GHz | R&S®NRP8S | 1419.0006.02 |
| 100 pW to 200 mW, 10 MHz to 8 GHz, LAN version | R&S®NRP8SN | 1419.0012.02 |
| 100 pW to 200 mW, 10 MHz to 18 GHz | R&S®NRP18S | 1419.0029.02 |
| 100 pW to 200 mW, 10 MHz to 18 GHz, LAN version | R&S®NRP18SN | 1419.0035.02 |
| 100 pW to 200 mW, 10 MHz to 33 GHz | R&S®NRP33S | 1419.0064.02 |
| 100 pW to 200 mW, 10 MHz to 33 GHz, LAN version | R&S®NRP33SN | 1419.0070.02 |
| 100 pW to 100 mW, 50 MHz to 40 GHz | R&S®NRP40S | 1419.0041.02 |
| 100 pW to 100 mW, 50 MHz to 40 GHz, LAN version | R&S®NRP40SN | 1419.0058.02 |
| 100 pW to 100 mW, 50 MHz to 50 GHz | R&S®NRP50S | 1419.0087.02 |
| 100 pW to 100 mW, 50 MHz to 50 GHz, LAN version | R&S®NRP50SN | 1419.0093.02 |
| Wideband power sensors | | |
| 50 MHz to 18 GHz, 100 mW | R&S®NRP-Z81 | 1137.9009.02 |

| Service options | | |
|--------------------------------------------------------|---------|---------------------------------------------------------|
| Extended Warranty, one year | R&S®WE1 | |
| Extended Warranty, two years | R&S®WE2 | |
| Extended Warranty with Calibration Coverage, one year | R&S®CW1 | |
| Extended Warranty with Calibration Coverage, two years | R&S®CW2 | Please contact your local Rohde & Schwarz sales office. |

Extended warranty with a term of one to two years (WE1 to WE2)

Repairs carried out during the contract term are free of charge¹⁶. Necessary calibration and adjustments carried out during repairs are also covered. Simply contact the forwarding agent we name; your product will be picked up free of charge and returned to you in top condition a couple of days later.

Extended warranty with calibration (CW1 to CW2)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs¹⁶ and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Rohde & Schwarz is under license.

CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA-USA).

¹⁵ For average power measurement only.

¹⁶ Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.

Service that adds value

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

About Rohde & Schwarz

The Rohde & Schwarz electronics group offers innovative solutions in the following business fields: test and measurement, broadcast and media, secure communications, cybersecurity, radiomonitoring and radiolocation. Founded more than 80 years ago, the independent company which is headquartered in Munich, Germany, has an extensive sales and service network with locations in more than 70 countries.

Sustainable product design

- | Environmental compatibility and eco-footprint
- | Energy efficiency and low emissions
- | Longevity and optimized total cost of ownership

Certified Quality Management
ISO 9001

Certified Environmental Management
ISO 14001

Rohde & Schwarz GmbH & Co. KG

www.rohde-schwarz.com

Rohde & Schwarz training

www.training.rohde-schwarz.com

Regional contact

- | Europe, Africa, Middle East | +49 89 4129 12345
customersupport@rohde-schwarz.com
- | North America | 1 888 TEST RSA (1 888 837 87 72)
customer.support@rsa.rohde-schwarz.com
- | Latin America | +1 410 910 79 88
customersupport.la@rohde-schwarz.com
- | Asia Pacific | +65 65 13 04 88
customersupport.asia@rohde-schwarz.com
- | China | +86 800 810 82 28 | +86 400 650 58 96
customersupport.china@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG
Trade names are trademarks of the owners

PD 3607.2790.22 | Version 02.00 | November 2016 (fi)

R&S®FSVA Signal and Spectrum Analyzer

Data without tolerance limits is not binding | Subject to change

© 2016 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany

