

Keysight Technologies

M8048A ISI Channels

Master Your Next Designs

Data Sheet



Key features

- Emulate a wide range of channel loss with cascadable ISI traces with fine resolution
- 4 short (7.7" to 12.8") and 4 long traces (14.4" to 34.4")
- Real Nelco FR4 PC board material with known S21 parameters
- Differential channels
- Supplementary to Keysight's compliant ISI channels (PCIe®, SATA, DP, HDMI)
- Small size

Description

The M8048A ISI Channels can be used to emulate channel loss in receiver test setups. A choice of 8 PC board traces with different lengths can be inserted into the signal path. The 8 trace lengths range from 7.7 inch (196 mm) to 34.4 inch (874 mm). By cascading the traces within one box or with the other box a wide range of channels can be emulated with very fine resolution steps. With their small size the ISI channels can be located closely to the device under test. The cascadable ISI channels are complemented by the Keysight Technologies, Inc. compliance channels for SATA, DisplayPort, PCI Express®, and HDMI.

Emulate channel loss

The channel loss between transmitter and receiver is a critical element for the receiver test for all electrical multi gigabit serial interfaces. The channel loss depends primarily on the distance between transmitter and receiver and the electrical medium. The channel loss is typically defined by the S21 parameter in dB for certain frequencies. Some standards define the receiver test to include a certain channel loss in the test setup. M8048A offers a wide range of cascadable channels to emulate certain S21 parameter conditions in a repeatable and accurate way.

Emulate intersymbol interference

Low-cost Nelco FR4 PC board material is very commonly used in many consumer and computer products. Long electrical cables are also very common (HDMI, DisplayPort and USB) for connecting consumer and computing devices. With increasing bit rates the signal degradations caused by the channel become a critical part for the receiver characterization and compliance test. The so-called intersymbol interference (ISI) caused by the channel degradation is a data dependant jitter or a bounded deterministic jitter. The ISI jitter added by a PC board trace not only depends on the trace length and the PC board material, but also depends on the data rate and the transmitted bit pattern. The ISI jitter a receiver must tolerate is typically defined in ps or mUI by each standard for the required bit rate and compliance pattern.

M8048A-001 Four Short ISI Channels 8 to 13 inches	M8048A-002 Four Long ISI Channels 14 to 34 inches
196 mm = 7.7"	366 mm = 14.4"
240 mm = 9.4"	408 mm = 16.1"
282 mm = 11.1"	620 mm = 24.4"
324 mm = 12.8"	874 mm = 34.4"

Figure 1. M8048A offers eight trace lengths for option 001 and 002.

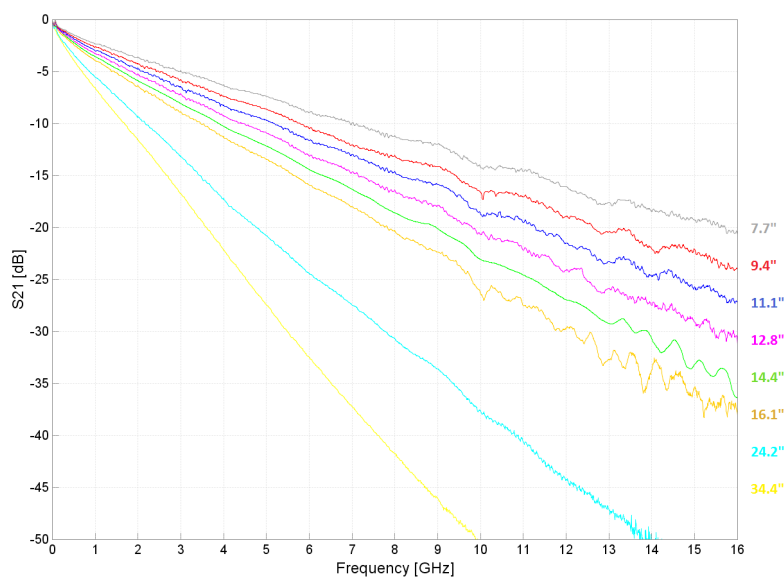


Figure 2. Shows the typical insertion loss for all M8048A-001 and -002 ISI channels.

Application examples

- SAS
- USB3
- UHS-II
- Thunderbolt
- SATA
- DisplayPort
- PCI Express

M8048A specifications



Figure 3: Front panel view of M8048A option 001 (top) and M8041A option 002 (bottom).

Table 1. Specifications	M8048A-001	M8048A-002
Trace lengths of Nelco FR 4	7.7"(196 mm) 9.4" (240 mm) 11.12 "(282 mm) 12.8"(324 mm)	14.4" (366 mm) 16.1" (408 mm) 24.4" (620 mm) 34.4" (874 mm)
Insertion loss	Typical values see figure 2 (excludes cables)	
Insertion loss for M8048A-801 cable	< 0.7 dB at 8 GHz typical	
Return loss	Better than -16 dB at up to 10 GHz typical Better than -12 dB at up to 16 GHz typical see figure 4	
Intra-pair skew	< 5 ps typical	
Input impedance	100 Ω differential, 50 Ω single ended, \pm 10% typical	
Max input voltage levels	\pm 5 V	
Interface	Differential or single-ended	
Connectors	SMA, female	

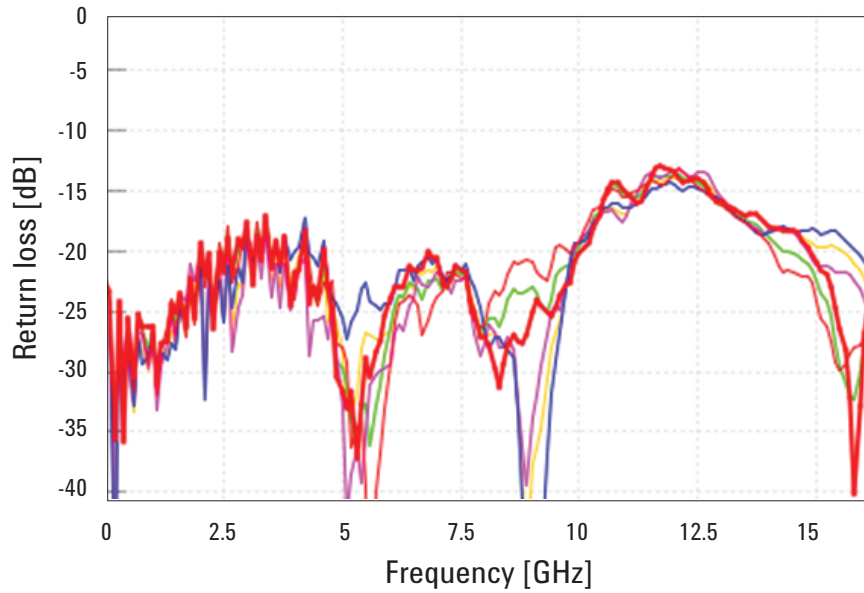


Figure 4: Typical return loss (reflection) – example for trace 14.4\".

Pattern PRBS 2¹⁵-1

Data rate	1.5 Gb/s		2.5 Gb/s		5 Gb/s		8 Gb/s		10.3 Gb/s		16 Gb/s	
Corresponding UI	667 ps		400 ps		200 ps		125 ps		97.1 ps		62.5 ps	
Trace length	ps	UI	ps	UI	ps	UI	ps	UI	ps	UI	ps	UI
M8048A-001												
7.7" (196 mm)	< 0.050 UI				10.8	0.054	13.5	0.108	15.6	0.161	24.4	0.391
9.4" (240 mm)					15.4	0.077	18.3	0.146	21.9	0.226	33.4	0.535
11.1" (282 mm)					20.7	0.104	24.8	0.198	29.3	0.301		
12.8" (324 mm)					26.6	0.133	32.3	0.258	39.2	0.404		
M8048A-002												
14.4" (366 mm)	< 0.050 UI		23.5	0.059	33.8	0.169	41.3	0.330	49.5	0.509		
16.1" (408 mm)			28.7	0.072	41.0	0.205	51.6	0.412				
24.4" (620 mm)	46.6	0.070	57.4	0.144	83.3	0.417						
34.4" (874 mm)	86.5	0.130	109.4	0.274								

Figure 5: Typical ISI jitter values for all traces at PRBS 2¹⁵ -1 pattern and selected data rates.



Figure 6: Rear panel view of M8048A-001 (left) and M8028A-002 (right).

Table 6. General characteristics

Operating temperature	5 °C to 40 °C (-23 °F to + 104 °F)
Storage temperature	-40 °C to +70 °C (module) (-65 °F to + 158 °F)
Operating humidity	15% to 95% relative humidity at 40°C (non-condensing)
Storage humidity	24% to 90% relative humidity at 65°C (non-condensing)
Physical dimensions (W x H x D) with connectors	Bench top (with bumper): 228 x 59 x 221 mm 9 x 2.3 x 8.7 inch Rack mount (without bumper): 213 x 44.5 x 221 mm 8.4 x 1.8 x 8.7 inch
Weight net	950 g (2.1 lb)
Warranty period	1 year return to Keysight
EMC	IEC 61326-1
Safety	IEC 61010-1
Quality management	ISO 14001, ISO 9001

Specification assumptions

The specifications in this document describe the instruments performance. All specifications if not otherwise stated are valid using the recommended cable set M8041A-801 (2.92 mm, 0.85 m, matched pair).

Related Keysight literature

J-BERT M8020A High-Performance BERT Data Sheet	5990-3217EN
N4915A-014 PCIe Compliance Channels Data Sheet	5990-7659EN
N4915A-005 DisplayPort ISI Generator Data Sheet	5990-8688EN
N4915-60001 SATA ISI Channel Data Sheet	n/a

Ordering instructions

Each M8048A option includes the following accessories by default: SMA matched cable pair for cascading ISI channels, functional test certificate, and certificate of conformance

ISI channel, 4 short traces (7.7" to 12.8")	M8048A-001
ISI channel, 4 long traces (14.4" to 34.4")	M8048A-002
SMA matched cable pair for cascading channels, 0.4 m, ± 5 ps (See figure 7)	M8048A-801

Recommended accessories:

Matched cable pair 2.92 mm, 0.85 m for connecting with M8020A	M8041A-801
Matched cable pair SMA, 0.4 m for cascading M8048A (one M8048A-801 is included in M8048A-001 and in M8048A-002 by default)	M8048A-801



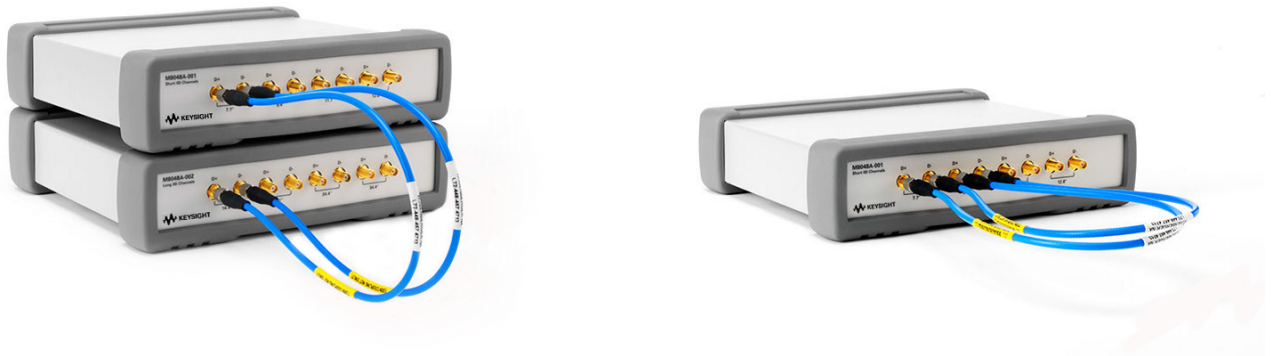


Figure 7: Short matched SMA cable pair for cascading ISI channels from two units or within one unit.

From Hewlett-Packard through Agilent to Keysight

For more than 75 years, we've been helping you unlock measurement insights. Our unique combination of hardware, software and people can help you reach your next breakthrough. **Unlocking measurement insights since 1939.**



1939

THE FUTURE

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
 (BP-02-10-16)



www.keysight.com/go/quality
 Keysight Technologies, Inc.
 DEKRA Certified ISO 9001:2015
 Quality Management System

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.



Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's committed to superior product quality and lower total cost of ownership. Keysight is the only test and measurement company with three-year warranty standard on all instruments, worldwide. And, we provide a one-year warranty on many accessories, calibration devices, systems and custom products.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Infoline

Keysight Infoline

www.keysight.com/find/service

Keysight's insight to best in class information management. Free access to your Keysight equipment company reports and e-library.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

PCI-SIG®, PCIe® and the PCI Express® are US registered trademarks and/or service marks of PCI-SIG.

www.keysight.com/find/m8048a